
## Plan 3

(Door & Intercom)

## Entryphone® 200 Series Video Wiring Diagrams with single button door unit

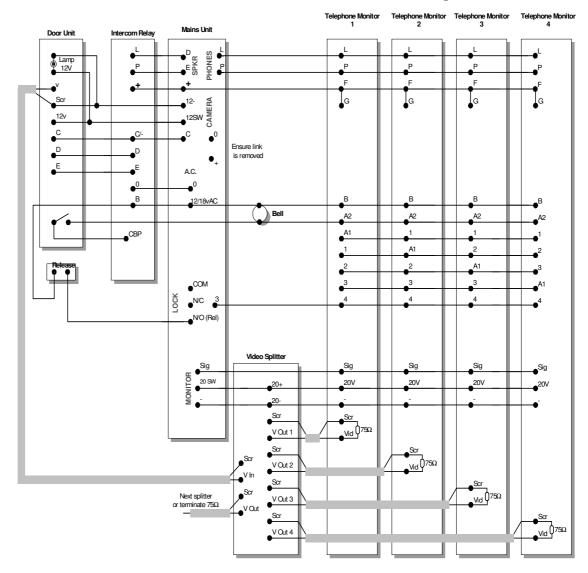

## Operation

Plan 3 provides As plan 1 but with the additional facility of full internal intercom between up to four telephones. A video telephone is activated for a preselected time when it is called or by turning on the telephone locally. Local activation can be disabled if required. The intercom relay detects when an internal call is made and turns off the speech to the door unit. When a handset is replaced the relay switches back to its default position with the door speech connected.

**Notes** 

- Adjustment of overall speech volume is achieved by varying the DC speech voltage.
- 75 ohm termination resistors are fitted in each phone and are required at all co-axial line ends. If there are two monitors on one splitter output then the termination resistor must be on the furthest monitor only.
- On the 200 series video telephone the circuit board should be unclipped at the bottom edge and the board removed to access a choice of fixing holes.
- Colour, contrast and brightness are set at manufacture. There are controls on the circuit board that are not available to the user

PROBLEM?
PLEASE DO NOT HESITATE TO CONTACT OUR
TECHNICAL DEPARTMENT
WE ARE HERE TO HELP!

020 8870 8635

The Entryphone Co.Ltd. 23 Granville Road London SW18 5SD Tel: 020 8870 8635

Fax: 020 8874 0066 wd 1v.p65